


### KEY FEATURES

- Intel® 12th Gen Alder Lake P MCP Processors
- 2 x 260-pin SO-DIMM DDR4 3200 MHz, up to 64 GB (32GB per DIMM)
- 1 x PCIe x1, 2 x USB 3.2 Gen2x2, 3 x USB 3.2 Gen2, 2 x USB 2.0, 1 x M.2 Key M, 1 x M.2 Key E, 1 x M.2 Key B, 3 x COM, 1 x SATA3
- 2 x Intel 2.5 Gigabit LAN
- Supports Quad display, 1 x HDMI 2.0b, 3 x DP 1.4a (2 from Type-C), 1 x LVDS or eDP
- TPM 2.0 onboard IC
- Supports Intel® vPro (SBC-370P/SBC-370M), VMD RAID 0/1
- 12~36V DC-In PWR/ 12V DC-In only (BOM option)

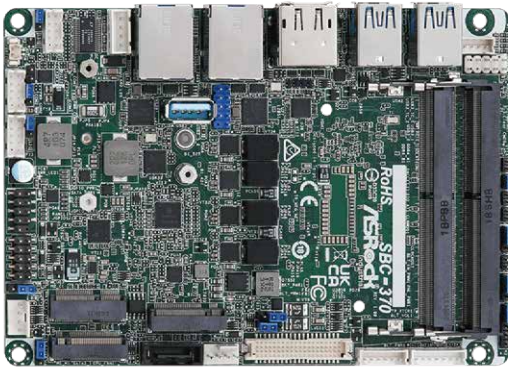

### SPECIFICATIONS

#### Form Factor

Dimensions	3.5" SBC ( 5.8-in x 4-in x 0.94-in, 14.7 cm x 10.2 cm x 2.40 cm)
------------	--

#### Processor System

CPU	Intel® 12th Gen Alder Lake P MCP Processors SBC-370P (i7-1265UE, 2P+8E) SBC-370M (i5-1245UE, 2P+8E) SBC-370V (i3-1215UE, 2P+4E)
Chipset	MCP
BIOS	AMI SPI 256 Mbit

#### Memory

Technology	Dual Channel DDR4 3200 MHz
Capacity	64GB (32GB per DIMM)
Socket	2 x 260-pin SO-DIMM

#### Graphics

Controller	Intel® Iris® Xe Graphics
HDMI	HDMI 2.0b Max resolution up to 4096 x 2160@60Hz
DisplayPort	DP 1.4a Max resolution up to 4096 x 2160@60Hz
LVDS	Dual channel 24 bit up to 1920 x 1200@60Hz (Connector shared with eDP)
eDP	Max resolution up to 1920 x 1080@60Hz (Connector shared with LVDS)
MultiDisplay	Quad display (Included 2 output from Type-C)

#### Expansion Slot

PCIe	1 x PCIe x1 Gen3 (supports up to 10W)
M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless 1 x M.2 (Key B, 3042/3052) with PCIe x1 or SATA3 and USB 3.2 and USB 2.0 and SIM for 4G/5G
SIM Socket	1 x SIM socket connected to M.2 key B

#### Audio

Interface	Realtek ALC256 HD, High Definition Audio. Line-out, Mic-in
-----------	--

#### Ethernet

Controller/ Speed	SBC-370P/SBC-370M LAN1: Intel® I225LM with 10/100/1000/2500 Mbps, supports vPro LAN2: Intel® I225LM/I225V with 10/100/1000/2500 Mbps SBC-370V LAN1: Intel® I225LM with 10/100/1000/2500 Mbps LAN2: Intel® I225LM/I225V with 10/100/1000/2500 Mbps
Connector	2 x RJ-45

#### Rear I/O

HDMI	1 x HDMI 2.0b
DisplayPort	1 x DP 1.4a
Ethernet	2 x 2.5 Gigabit LAN
USB	2 x USB 3.2 Gen2 2 x USB 3.2 Gen2x2 (Type-C, 5V/3A, support DP1.4a display output)

#### Internal Connector

USB	1 x USB 3.2 Gen2 2 x USB 2.0 (1x2.54 pitch header)
COM	COM1, COM3, COM4 (RS-232/422/485)
GPIO	4 x GPI, 4 x GPO
LVDS	1 (Connector with LVDS/eDP signal, switch by BIOS)
SATA PWR Output	1
Speaker Header	1

#### Storage

M.2	1 x M.2 (Key M, 2242/2260/2280) with PCIe x4 for SSD
SATA	1 x SATA3 (6Gb/s)
RAID	Intel® VMD RAID 0/1 **supported by PCIe interface PCIe interface: M.2 Key B + M.2 Key M

#### Security

TPM	TPM 2.0 onboard IC
-----	--------------------

#### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

#### Power Requirements

Input PWR	12~36V DC-In with 4-pin wafer PWR cable or DC Jack 12V DC-In only (BOM option)
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

#### Environment

Operating Temp	-20°C ~ 70°C
Storage Temp	-40°C ~ 85°C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%