

# Apacer

The Most **Reliable**  
Storage For Industries



## UDMII Plus-M (Type C)




**HS ITALIA**

Distributore ufficiale per l'Italia  
+39 0536 830620  
info@hs-italia.it  
www.hs-italia.it

## UDMII Plus-M (Type C)

### Overview

Apacer also introduces MLC (Multi-Level Cell) flash memory offerings. Boasting the sequential read/write speed of as fast as 33/16 MB per second, the product is available from 4 GB to 64 GB in capacities. Apacer's USB-Disk Module (UDM) II Plus is a high performance, embedded flash disk module designed to replace a conventional IDE hard disk drive. UDM SSD can be plugged into a standard Embedded USB connector commonly found in desktops, portable PC systems and industrial PC systems. This UDM SSD is well suited for embedded flash storage applications offering new and expanded functionality as well as more cost-effective designs, better performance and increased reliability.




### Feature

- Compliant with the standard USB specifications
- Compact size and varies in dimensions
- Support Linux / WinCE/ XP Embedded/Win7 Embedded
- Shock resistance and anti-vibration
- Low power consumption
- Dimension: 37.8x26.65x10.5(mm)(Standard 90 Degree Mounting Screw)

## Specifications

<b>Model</b>	UDMII Plus-M (Type C)
<b>Interface</b>	USB 2.0
<b>Connector</b>	10-pin USB (2 x 5 header)
<b>NAND Flash Type</b>	MLC
<b>Capacity</b>	4GB~64GB
<b>External DRAM</b>	No
<b>Sustained Read Performance (MB/sec)</b>	Up to 33
<b>Sustained Write Performance (MB/sec)</b>	Up to 16
<b>ECC Engine</b>	Built-in up to 24-bit per 1K bytes BCH ECC
<b>Standard Operating Temperature ( °C )</b>	0 ~ + 70
<b>Storage Temperature ( °C )</b>	-40 ~ + 100
<b>Shock</b>	Operation: 50G, 11ms Non-operation: 1500G, 0.5ms
<b>Vibration</b>	Operation: 7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G) Non-operation: 15G, 10 ~ 2000 Hz/sine
<b>Operating Voltage</b>	3.3 V ± 5%
<b>Power Consumption</b>	Active mode: 165 mA & Sleep mode: 66 mA
<b>Dimension (L x W x H )</b>	37.8 x 26.65 x 10.5
<b>MTBF (hours)</b>	>1,000,000

## Mechanical Specification

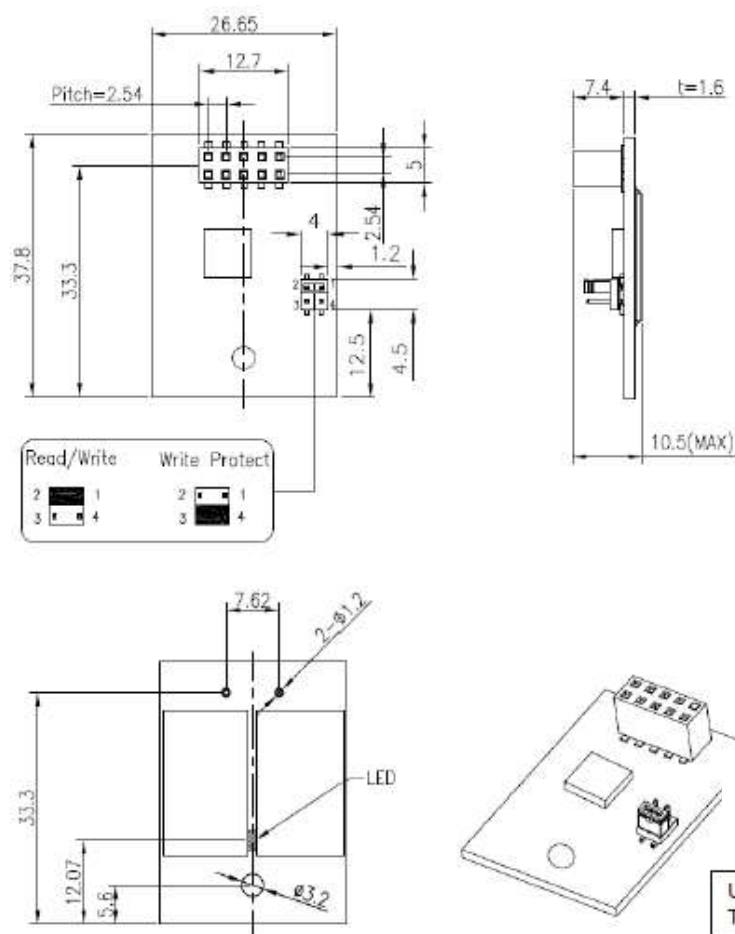

Unit: mm

For more information, contact your Apacer representative

### Global Presence

Taiwan (Headquarters)  
Apacer Technology Inc.  
Tel: +886-2-2267-8000  
Fax: +886-2-2267-2261

Europe  
Apacer Technology B.V.  
Tel: +31-40-267-0000  
Fax: +31-40-290-0686

U.S.A.  
Apacer Memory America, Inc.  
Tel: +1-408-518-8699  
Fax: 1-510-249-9551

China  
Apacer Electronic(Shanghai)  
Co., Ltd.  
Tel: +86-21-6228-9939

Japan  
Apacer Technology Corp.  
Tel: +81-3-5419-2668  
Fax: +81-3-5419-0018

India  
Apacer Technologies Pvt. Ltd.  
Tel: +91-80-41529061~3  
Fax: +91-80-41700215